


TRAFFIC DIRECTION



BACK OF CURB

MINIMUM 24"

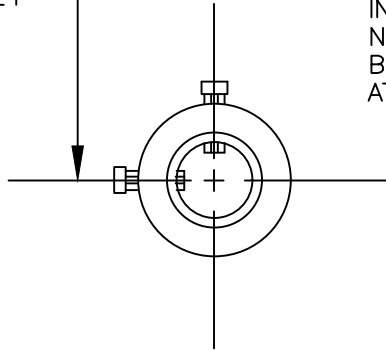


NOTE:

CARE MUST BE TAKEN TO MAKE SURE SIGN COLLAR IS INSTALLED IN A TRUE PLUMB POSITION. NON-PLUMB INSTALLATION WILL BE CORRECTED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CITY.

NOTE: USE LYLE TYPE SIGN MOUNTING BRACKETS, BR-95 OR APPROVED EQUAL

INSTALL COLLAR ASSEMBLY ABOVE SURFACE OF WALK, TRAIL OR MEDIAN.

SET SCREWS MUST BE ACCESSABLE WITH A WRENCH.

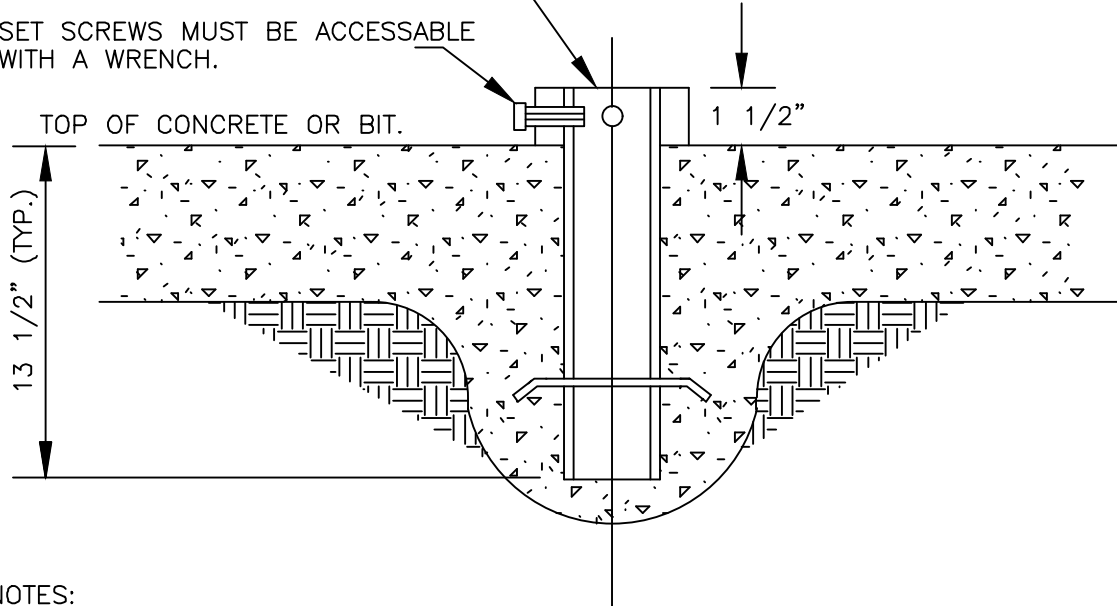

NOTES:

STANDARD COLLAR LENGTH IS 15", EXCEPTIONS SHALL BE APPROVED BY THE CITY ENGINEER.

MINNEAPOLIS STYLE SIGN POST ASSEMBLY MUST BE USED. USE 2 3/8" OUTSIDE DIAMETER GALVANIZED STEEL SIGN POST.



STANDARD DETAILS
SIGN POST EMBEDMENT ASSEMBLY
CITY OF PLYMOUTH

PUBLISHED
1-19

CITY PL. NO.
STRT-23
REVISED 3-11